


# ROKSANA

Technical information

[top-office.cz](http://top-office.cz)



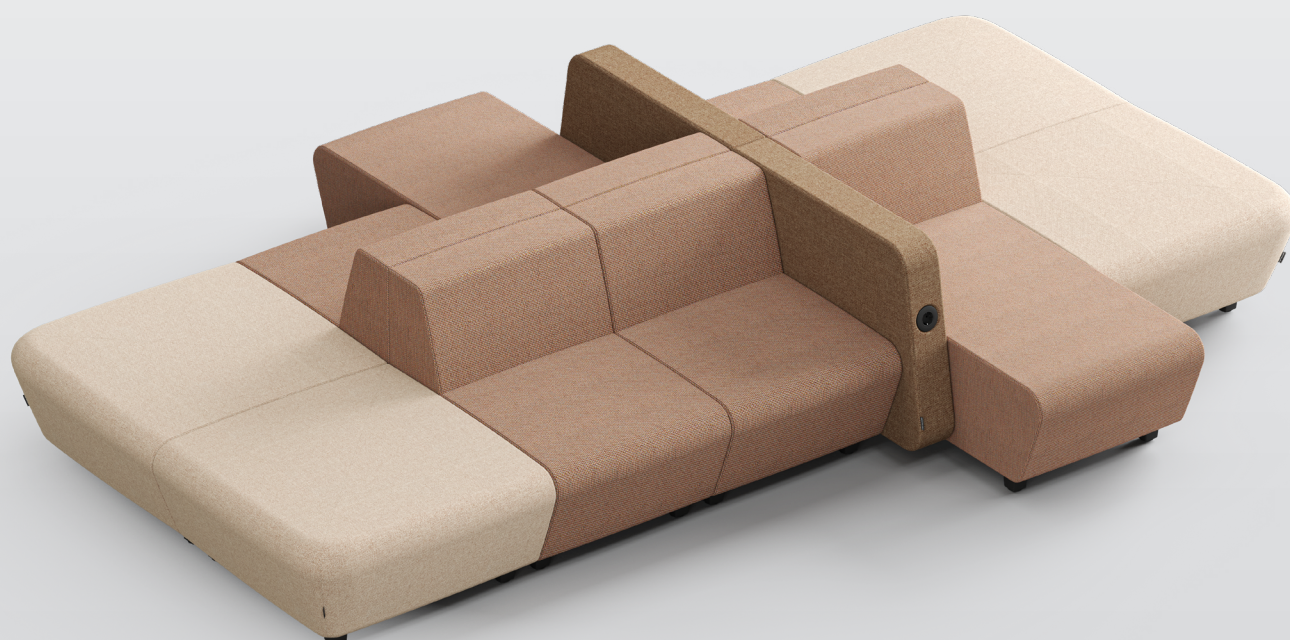

## Quality standard

LST EN 16139:2013 (level 2)

EN 1023-1:1998

EN 1023-2:2000

EN 1023-3:2000

LST EN ISO 354:2004

LST EN ISO 11654:1998

## 10 year Warranty

See Warranty statement


---

## Other documents available for this product

TOP OFFICE product care guide

Cable management guidelines for ROKSANA lounge & soft furniture

Ordering guidelines for ROKSANA lounge & soft furniture

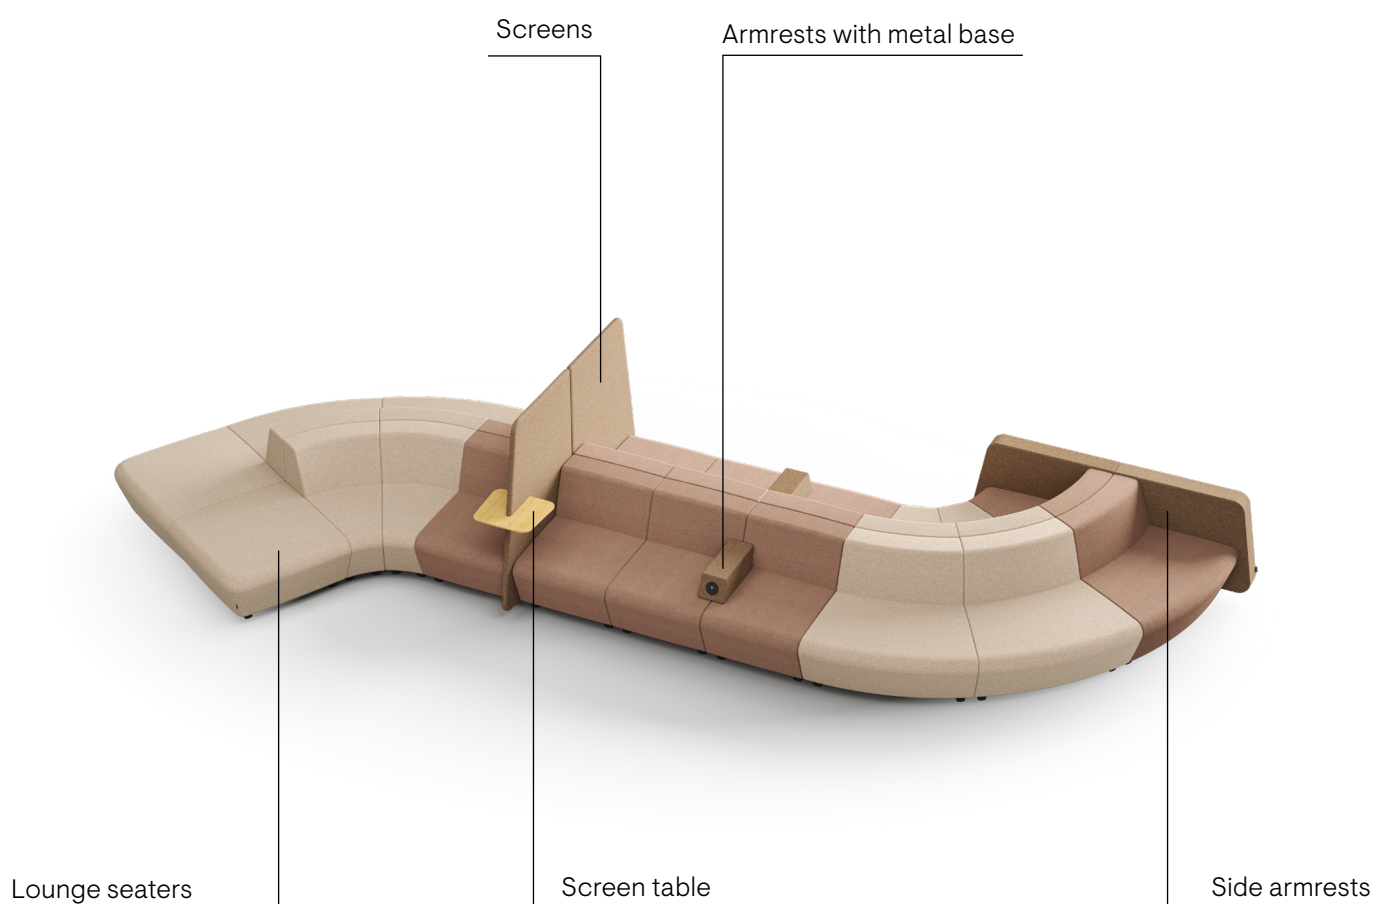



# Technical information


## Types

- Lounge chairs (1)
- Modular system (2)

1



2

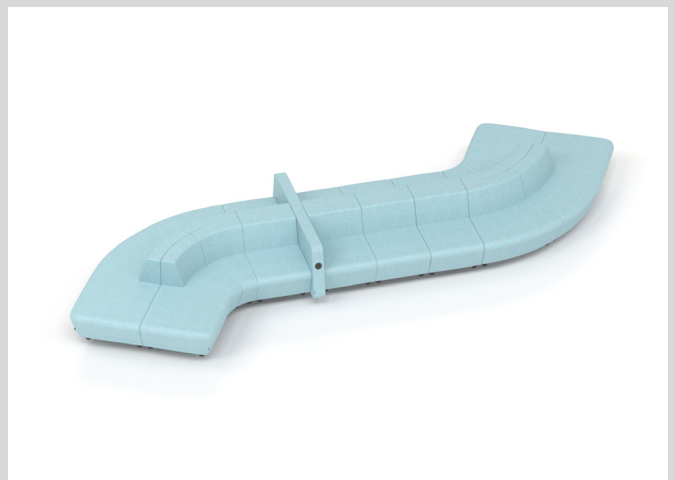



### Lounge seaters

- Black plastic feet with plastic glides (PP), height 63 mm, 4 pcs (felted glides adds extra 3 mm);
- Internal frames made from 15 mm chipboard;
- Curved internal frames made from 15 mm chipboard and 15 mm bent plywood;
- Backrest fixed to the internal frame with powder coated metal tubes 40x30 mm;
- Bottom plate made from 25 mm MFC (melamine) with 2 mm ABS edging;
- Bottom plate fixed to the internal frame with powder coated connectors from metal tube 60x60 mm;
- Bottom plates have ability to install linking brackets, which allows linkage of the seaters into modular combinations;
- Maximum functional load 110 kg;
- Preassembled connectors (metal) for side armrests or screens for quick mounting;
- Seats made from molded polyurethane foam (density: 55 kg/m<sup>3</sup>);
- Backrests made from molded polyurethane foam (density: 55 kg/m<sup>3</sup>);
- Sides and backs softened with foam VB3842 (density: 36-39 kg/m<sup>3</sup>);
- Upholstered with fabric or RNN, without gluing.

### Side armrests

- Internal frame made from 12 mm, 25 mm chipboard, 3 mm HDF and 3 mm flexible plywood;
- Preassembled connectors (plastic) for quick mounting to lounge seaters;
- Covered with foam VB3842 (density: 36-39 kg/m<sup>3</sup>);
- 1 AC power socket 100 – 230 V (EU, UK, FR, CH, US) or USB fast charger (USB Type A+C, max 5A), cable ends with connector GST18i3 male, length – 0,3 m;
- Upholstered with fabric or RNN.

### Armrests with metal base

- Internal frame made from 12 mm chipboard and 3 mm HDF;
- Covered with foam VB3842 (36-39 kg/m<sup>3</sup>);
- 1 AC power socket 100 – 230 V (EU, UK, FR, CH, US) or USB fast charger (USB Type A+C, max 5A), cable ends with connector GST18i3 male, length – 0,6 m;
- Bottom base, for positioning between seaters, made from 3 mm metal sheet, black powder coated;
- Upholstered with fabric or RNN.

### Screens

- Made from 16 mm chipboard;
- Covered with 10 mm acoustic foam;
- Preassembled connectors for quick mounting to lounge seaters;
- Upholstered with fabric or RNN.

### Screen table

- Made from 18 mm birch plywood, covered in veneer with sloping edges;
- All edges are rounded: R1 mm;
- Mounting brackets made from 4 mm metal sheet, black powder coated;
- Mounted 700 mm from the ground (300 mm from the seat);
- Bolts covered with black plastic (PE) caps.

### Linking brackets for lounge seaters

- Brackets are made from black powder coated metal tube 50x15 mm.



# Cable management (optional)

## Power supply cables

- AC plug – GST18i3 female connector;
- AC plug standards: EU, UK, FR, CH, US;
- Cable lengths: 1 m and 3 m;
- Cable core: 1,5mm<sup>2</sup> (EU, FR, UK, CH);
- Inline Overcurrent Protection (OCP 10A) (CH);
- Inline Overcurrent Protection fulfills statutory requirements: in the USA for more than 3 sockets, in Switzerland for more than 1 socket;
- Black color.

## Distributor blocks

- GST18i3 1-2 block (1 IN (male), 2 OUT (female)), black color;
- GST18i3 1-3 block (1 IN (male), 3 OUT (female)), black color;
- GST18i3 1-5 block (1 IN (male), 5 OUT (female)), black color.




## Extension cables

- GST18i3 female connector – GST18i3 male connector;
- Cable lengths: 1 m, 2 m and 3 m;
- Cable core: 1,5 mm<sup>2</sup> (EU, FR, UK, CH);
- Black color.


# Range

## Lounge chairs

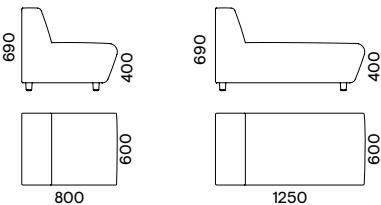


## Modular system


### Seaters

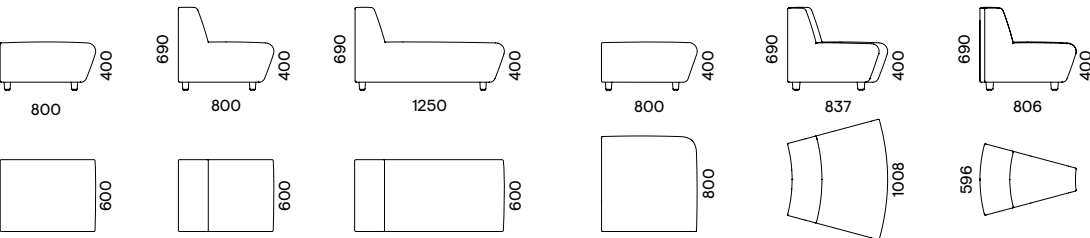


### Armrest




### Side armrest



### Screens

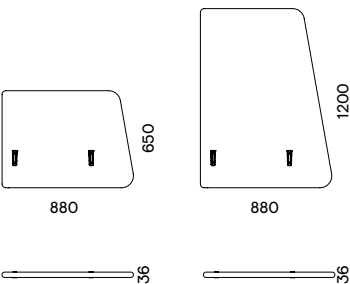

### Screen with a coffee table









# Additional information

## Ordering linking brackets for lounge seaters

- Linking brackets can be used to connect lounge seaters through sides or back;
- Current combination, below, consists of: G5R0121.000 – 3 pcs., G5R0122.000 – 3 pcs., G9A0022 – 6 pcs.:

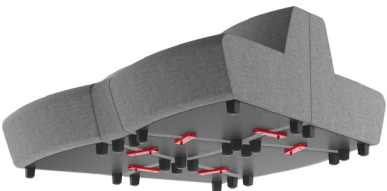

- For modularity, like this below, is enough to connect every second or every third back with G9A0022: G5R0118.000 – 10 pcs., G9A0022 – 11 pcs.

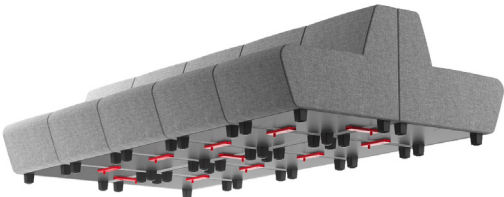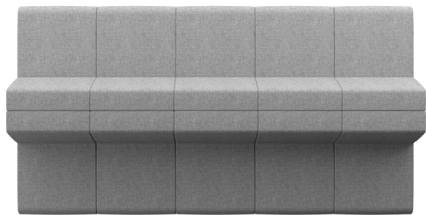

## Preassembled connectors on lounge seaters

- Depending on modularity, lounge seaters can be ordered with factory preassembled connectors for faster side armrest and screens assembly;

Metal connector pre-assembled on lounge seaters



Plastic connectors pre-assembled on screens or side armrests

Metal connector pre-assembled on lounge seater




Plastic connector preassembled on screen








- Seaters G5R0117, G5R0118 and G5R0119 can have factory preassembled metal connectors for 2 sides: R/H (A) and L/H (B);



- Seaters G5R0120, G5R0121 and G5R0122 can have factory preassembled metal connectors for 2 sides: R/H (A) and L/H (B);



#### Screens or side armrests connections

- Center versions of side armrests or screens have preassembled connectors on both sides and two separate seaters combines into one. **In this case G9A0022 cannot be used;**
- Current combination consists of: G5R0118.001 – 2 pcs., G5R0118.100 – 2 pcs., G5E0102 – 2 pcs., G9A0022 – 2 pcs.





!


## Not recommended combinations



- G5R0122 cannot stand alone;



- G5R0122 cannot stand alone with armrest (-s) or screen (-s);



- G5R0122 cannot stand in the middle between G5R0119;



- G5R0117 cannot stand alone with armrest or screen from one side;



- Armrests G5E0109, G5E0110, G5E0111 or G5E0115 have metal base and can only be placed between two seaters.

